


## UAP ALL STAINLESS STEEL 12 INCH FIRE RESISTANT LETTERPLATE

For 40–80mm Door Profiles

The UAP fire resistant heavy duty all stainless steel 12 inch Certifire letterplate comes with both an external and internal flap to protect your customer's homes, and is available in 40-80mm depths for composite and wooden doors. It has been tested to Certifire standards for up to 30 minutes on wooden and timber doors!

The all stainless steel Certifire letterplate is lined with special intumescent material which expands to 50 times its size, blocking the hole in the cavity and preventing smoke coming through the cavity. The intumescent is activated at 5 degrees lower than most other intumescent material in the market, meaning that the cavity will be blocked quicker.

The Certifire letterplate also uses special heat absorbers which stops the screws, once they are red hot, melting the plastic around them and causing the letterbox to fall off.

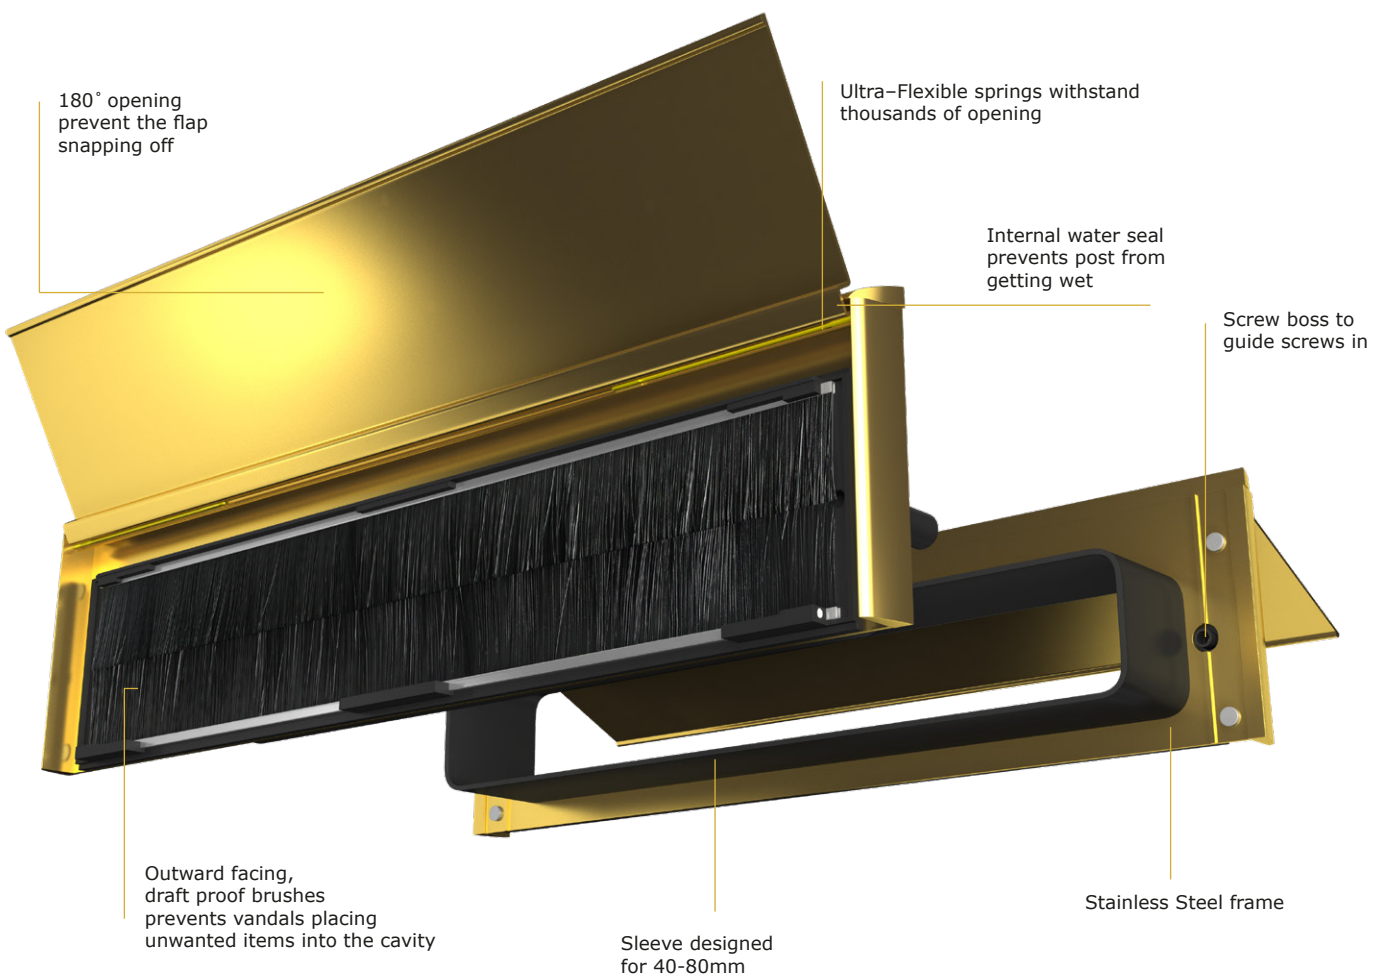

ANTI SNAP FLAP



ANTI VANDAL



ANTI BURGLAR



30 min  
Fire Rated



Nan Ya  
Composite



1hr  
Fire Rated



Timber

## Features Include:

- 60 minutes fire rated
- Made from 316 grade stainless steel
- Lined with special intumescent material which expands to 50 times its size
- Uses special heat absorbers to stop hot screws melting the plastic
- Intumescent activated at 5 degrees lower than most in the market
- Designed for 40-80mm thick composite and wooden doors
- LIFETIME coating guarantee anywhere in the country
- Outward facing brushes create the Anti-Vandal feature as it prevents vandals from placing unwanted items into the cavity
- Outwards facing brushes also means better draught proofing and makes it easier to post letters through
- 180 degree opening flap means the flap will not snap off when opened too far
- Blind bolts to the exterior of the letterplate prevents the outer frame being unscrewed from the door externally
- An internal water seal prevents water getting into the door or panel, and stops letters getting wet
- Ultra-flexible springs can withstand the letterbox flap opening thousands of times without breaking
- Conforms to many standards and testing requirements including BS EN 1303:2005



## Measurements

Distance Between Screw Holes	<b>272mm</b>
Letterplate Length	<b>300mm</b>
Letterplate Height	<b>74mm</b>
Frame Material	<b>Stainless Steel</b>
Cavity Hole Size	<b>257mm x 42mm</b>

## UAP ALL STAINLESS STEEL 12 INCH FIRE RESISTANT LETTERPLATE

Finishes	Product Code	Flap Material Construction	Coating Guarantee
PVD Gold	FMSS1248PVDG-NANOCOAST	316 Grade Stainless Steel	LIFETIME
Mirror Polished	FMSS1248MPSS-NANOCOAST	316 Grade Stainless Steel	LIFETIME
Satin Stainless	FMSS1248SSS-NANOCOAST	316 Grade Stainless Steel	LIFETIME

