


## STRAIGHT PULL HANDLE

We consulted with several door manufacturers during the design process of our pull handles to ensure the handles met the desired specifications of the majority, and didn't have any downsides that may be present on pull handles currently on the market.

The result of this research is a range of high quality pull handles that are produced from 1.5mm grade 316 stainless steel, have a 38mm diameter for a sturdier construction and an easier grip for people with limited hand movements, and three different fitting options. These incorporate UAP's Nanocoast® technology and so come with a free lifetime guarantee against surface corrosion.

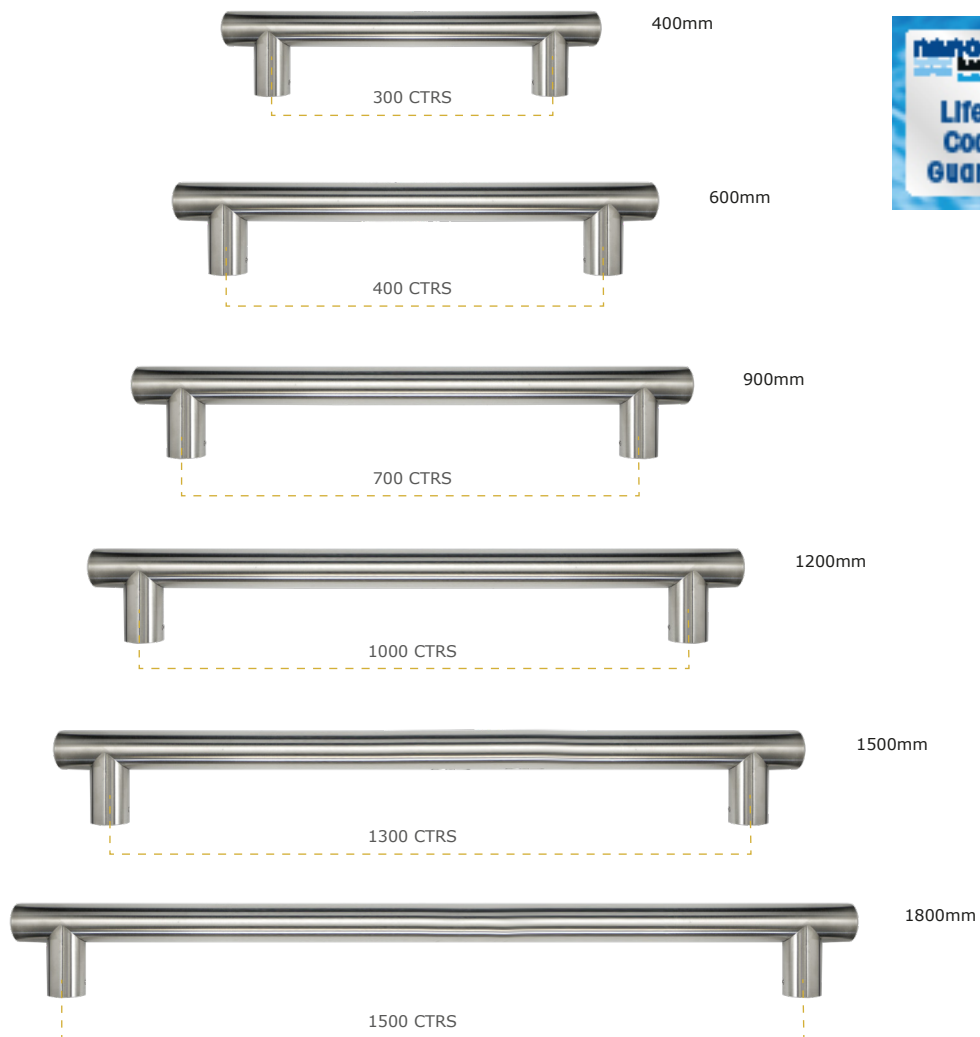

Size	Code	Shape	Centres	Material Construction	Coating Guarantee
400mm	PH400S-SSS-NANOCOAST	Straight	300mm	Stainless Steel	LIFETIME
600mm	PH600S-SSS-NANOCOAST	Straight	400mm	Stainless Steel	LIFETIME
900mm	PH900S-SSS-NANOCOAST	Straight	700mm	Stainless Steel	LIFETIME
1200mm	PH1200S-SSS-NANOCOAST	Straight	1000mm	Stainless Steel	LIFETIME
1500mm	PH1500S-SSS-NANOCOAST	Straight	1300mm	Stainless Steel	LIFETIME
1800mm	PH1800S-SSS-NANOCOAST	Straight	1500mm	Stainless Steel	LIFETIME

## Features Include:

Made from 1.5mm 316 grade stainless steel

38mm diameter for sturdier construction

Easier to grip for those with arthritis or limited hand movement

All pull handles have two fixing points with an individual plate on each

Comes with an Allen Key and 2 Allen Bolts on each of the up-stands

3 fixing methods available – hidden fixings, bolt through and back to back

Each pull handle comes with a LIFETIME coating guarantee!

Whats makes the straight pull handle really stand out is the 3 different fixing methods available – hidden fixings, bolt through and back to back fixings. Due to the fixing methods, customers also have the option of sending the door to the site without the straight pull handle on, this will prevent damage in transit or on site. The door will simply be sent with the fixings on and the installation would be completed on site:

## Hidden Fixings

The pull handle comes with two fixing points each with an individual plate. These are fitted to wooden and timber doors using three screws. The pull handle then attaches to the plates and is secured with the Allen bolts. The internal fixings are not visible on the door!

## Bolt Through

The bolt through method uses a brass thread reducer; this is included in one of the two accessory kits. The brass thread reducer has a 1.5mm thread on the outside which will thread into the upstand. On the internal of the reducer is an N8, this is an 8mm bolt through which provides an ideal position for an internal bolt to fit through. The two Allen bolts give extra protection against vibrations that may take effect on a main road causing bolts to come undone. With the Allen bolts this will not happen!

## Back to back

We have developed a system which is incredibly easy to use and which will reduce fitting times to just seconds. Included in the second accessory kit is two plates which have holes all the way through. Once the plate is fitted on the inside of the door, the bolt can be pushed through the plate and screwed into the brass reducer. The internal pull handle would then be fitted using the hidden fix system. This offers an extremely strong back to back fixing method!

