

DOOR CLOSER

When it comes to door hardware, there are a variety of great products that you can offer to your customers. Doors in heated or cooled high traffic areas are frequently left open, meaning that a lot of money can be wasted on electricity. But by simply fitting a quality door closer, the door will close smoothly after each person that walks through, keeping the temperature in that area constant. And if the door needs to stay opened, it can be adjusted accordingly to guarantee fully comfort and versatility.

The UAP Architectural Fire Resistant Door Closer offers many impressive features. It is size 3, and has been developed to prevent fire from spreading for up to 60 minutes.

A 2 Valve Adjustment is designed for easy and fast adjustment of the closing and latching speeds of the closer, and the universal application features non handed for standard top jamb. There are two installation options on the door closer. To make fitting easier and more versatile, the door closer can be installed parallel or corner bracket.

Suits doors with
60kg maximum
weight


Suits doors with
2100mm x 950mm
maximum size

Tested to 1,000,000
operating cycles



Features Include:

- 1 Hour Fire Rated
- Size 3 architectural door closer
- Suits doors with 60kg maximum weight
- Suits doors with 2100mm x 950mm maximum size
- Universal application
- Two installation options
- Adjustable closing speed
- Adjustable latching speed
- Stable closing time – submitted to temperatures between -15°C and 40°C
- Tested to 500,000 operating cycles
- 60 minute fire resistant – Fire tested to BS EN 1634 for FD60 timber doors and FD240 steel doors
- CE Tested to BS EN 1154 for 1121 CPD-AD-0169
- 10 year guarantee

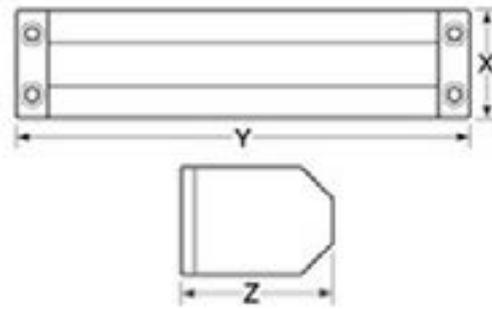

- X - 43mm
- Y - 180mm
- Z - 60mm



Finishes	Product Code
Silver	FDCS3
Black	FDCB3
Architrave Bracket For Fdcs3	FDCS3-A-BRACKET



ARCHITRAVE BRACKET FOR FDCS3