


# Salamander

## FIRE RESISTANT HEAVY DUTY ALL STAINLESS STEEL 12 INCH LETTERPLATE

For 40–80mm Door Profiles

The Salamander® fire resistant heavy duty all stainless steel 12 inch letterplate comes with both an external and internal flap to protect your customer's homes, and is available in 40-80mm depths for composite and wooden doors.

The all stainless steel letterplate is lined with special intumescent material which expands to 50 times its size, blocking the hole in the cavity and preventing smoke coming through the cavity. The intumescent is activated at 5 degrees lower than most other intumescent material in the market, meaning that the cavity will be blocked quicker. The Salamander® heavy duty letterplate also uses special heat absorbers which stops the screws, once they are red hot, melting the plastic around them and causing the letterbox to fall off.

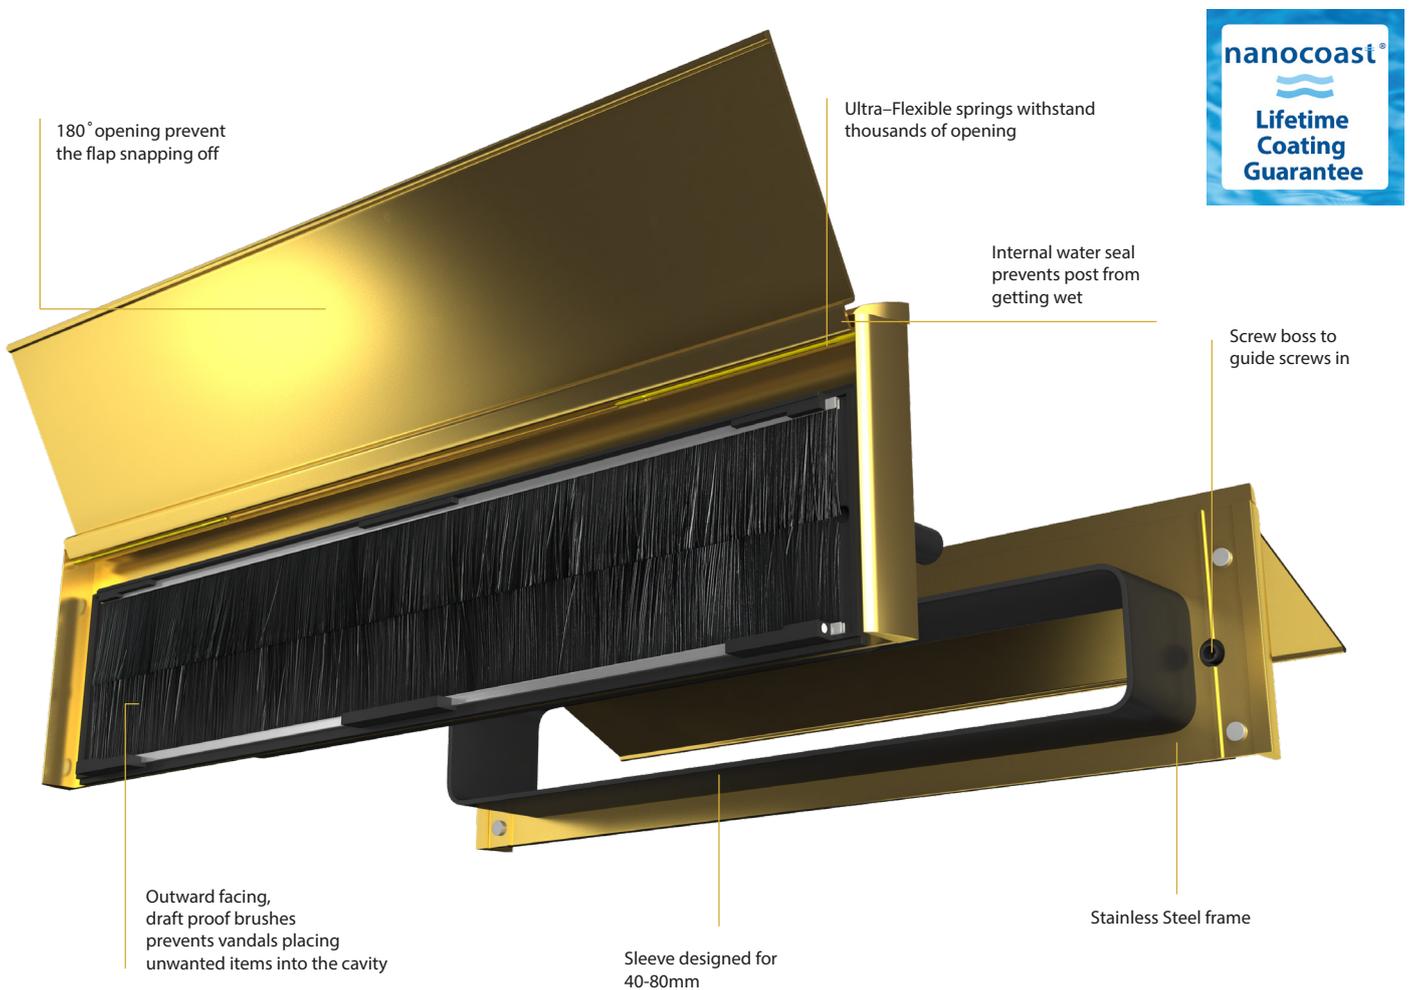

ANTI SNAP FLAP



ANTI VANDAL



ANTI BURGLAR



# Salamander

## Features Include:

- Fire Rated 1 Hour Timber, 30 min Foam Core
- Lined with special intumescent material which expands to 50 times its size
- Uses special heat absorbers to stop hot screws melting the plastic
- Intumescent activated at 5 degrees lower than most in the market
- Designed for 40-80mm thick composite and wooden doors
- Made from 316 grade stainless steel
- LIFETIME coating guarantee anywhere in the country
- Outward facing brushes create the Anti-Vandal feature as it prevents vandals from placing unwanted items into the cavity
- Outwards facing brushes also means better draught proofing and makes it easier to post letters through
- 180 degree opening flap means the flap will not snap off when opened too far
- Blind bolts to the exterior of the letterplate prevents the outer frame being unscrewed from the door externally
- An internal water seal prevents water getting into the door or panel, and stops letters getting wet
- Ultra-flexible springs can withstand the letterbox flap opening thousands of times without breaking
- Conforms to many standards and testing requirements including aspects of BS EN 13724:2013



## Measurements

Distance Between Screw Holes	272mm
Letterplate Length	300mm
Letterplate Height	74mm
Frame Material	Stainless Steel
Cavity Hole Size	257mm x 42mm

## Salamander® All Stainless Steel 12 Inch Fire Resistant Letterplate

Finishes	Product Code	Flap Material Construction	Coating Guarantee
PVD Gold	FMSS1248PVDG-HD-FR-NANOCOAST	316 Grade Stainless Steel	LIFETIME
Mirror Polished	FMSS1248MPSS-H-FR-NANOCOAST	316 Grade Stainless Steel	LIFETIME
Satin Stainless	FMSS1248SSS-HD-FR-NANOCOAST	316 Grade Stainless Steel	LIFETIME

